

Technical Datasheet

Portrait Cabinets



Box Contents

Portrait Cabinet | 4 smoked glass shelves | 1x Wall hanging bracket | Fixing Kit | Instructions booklet

FAQ

| | Units | PTC050 | PTC060 | PTC080 |
|---|-------|---|----------------|----------------|
| Recess dimensions (L x W) | mm | 473 x 673 x 85 | 573 x 673 x 85 | 773 x 673 x 85 |
| Internal dimensions (L x W x D) | mm | 190 x 640 x 91 | 240 x 640 x 91 | 340 x 640 x 91 |
| Shelf dimensions (L x W x D) | mm | 178 x 70 x 5 | 228x 70 x 5 | 328 x 70 x 5 |
| Max shelf spacing | mm | 315 | 15 | 315 |
| Distance between door hinges | mm | 510 | 510 | 510 |
| Individual door dimensions (L x W x D) | mm | 470 x 666 x 6 | 282 x 666 x 6 | 381 x 666 x 6 |
| Door opening angle | ° | 90 | 90 | 90 |
| Depth with door fully open | mm | 578 | 393.5 | 493.5 |
| Hanging bracket centres | mm | NA | NA | NA |
| What is the thickness of the mirror glass? | mm | 3+3mm | 3+3mm | 3+3mm |
| What size fuse should I use? | - | Seek the advice of an electrician | | |
| Where is the switch sensor located? | - | Underneath | | |
| Can the LED lighting be replaced? | - | No | | |
| Can the switch sensor be replaced? | - | No | | |
| How do I turn on the demister pad? | - | The demister pad will turn on when the LEDs are turned on. | | |
| Are illuminated cabinets/mirrors supplied with mains cable? | - | All illuminated cabinets/mirrors are supplied with a removeable 500mm mains cable. There is ample storage for excess cable in the back of the unit. | | |

Technical Datasheet

Portrait Cabinets

Electrical Specification


| Product Code | Input Voltage | Lamp Type | Total Wattage (LED & Demist) | Demist (W) | Demist Size (mm) | LEDs (W) | LED (lm) | Energy Rating | CCT (K) | CRI | IP Rating | Electrical Class |
|--------------|---------------|-----------------|------------------------------|------------|------------------|----------|----------|---------------|-----------|-----|-----------|------------------|
| PTC050 | 220-240V 50Hz | 12V DC LED Lamp | 59.5 | 25.0 | 200x298 | 24.0 | 1728 | F | 3000-6000 | 85 | IP44 | Class I |
| PTC060 | 220-240V 50Hz | 12V DC LED Lamp | 86.5 | 50.0 | 200x299 | 26.0 | 1872 | F | 3000-6000 | 85 | IP44 | Class I |
| PTC080 | 220-240V 50Hz | 12V DC LED Lamp | 90.5 | 50.0 | 200x300 | 30.0 | 2160 | F | 3000-6000 | 85 | IP44 | Class I |

Please note:


- Dimensions are subject to change. Customers are advised to measure actual product dimensions before commencing installation.
- Fixing point dimensions are for guidance only/the positions of wall fixing must be checked when product is received.
- The LED (lm) values represent the output of the LED. Actual product level Lumen output may vary depending on the diffuser material i.e., glass or acrylic.

Technical Datasheet

PTC050

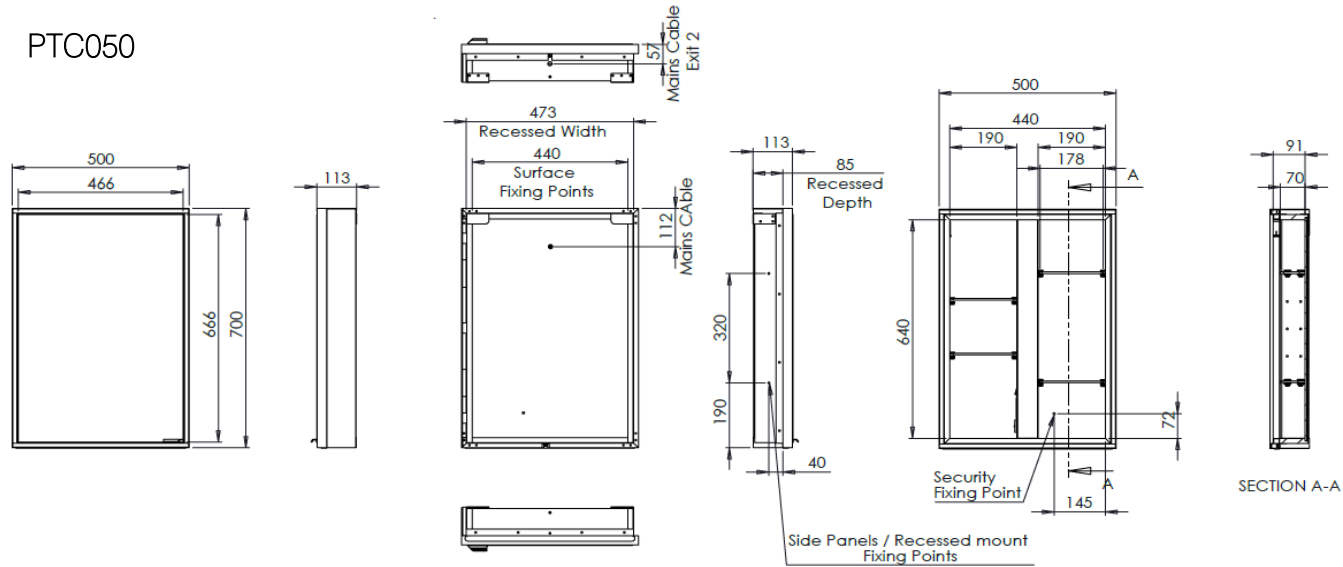

PTC060

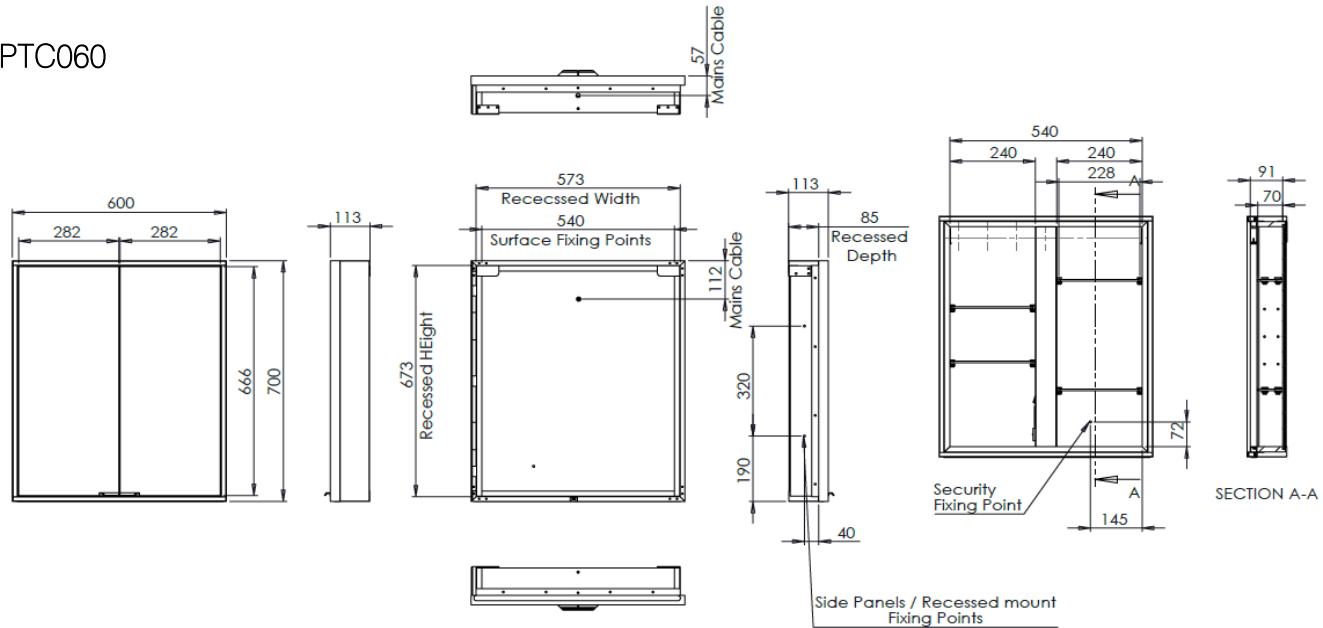

Technical Datasheet

PTC080

